



REVERSE OSMOSIS SYSTEM LPRO-B16-12000

Catalogue



LPRO-B16-12000

System Overview

- **Production:** 2m³/hr (48m³/day)
- **Membranes:** 4040 x 8
- **Feed TDS range:** ≤ 2000ppm with standard membrane
- **Typical salt rejection:** 95 - 99%
- **Power supply:** 380V 50Hz Three phase

Instrumentation




- **Conductivity:** Permeate
- **Flow meters:** Permeate, brine, brine recycle
- **Pressure gauges:** Pre & Post filter, Pre & Post membranes
- **Pressure switches:** Low pressure & high pressure

Material Of Construction

- **Frame Work:** SS304
- **Low pressure piping:** UPVC Class 16
- **High pressure piping:** UPVC Class 16
- **Pressure vessels:** FRP 300psi
- **Pumps:** SS304
- **Control Box:** Mild steel epoxy coated
- **Pre-filter housings:** Double length PVC bag filter

Feed Water Conditions

- **Temperature:** 5 - 35 ° C
- **TDS:** ≤ 2000ppm with standard membrane
- **SDI:** < 5
- **pH:** 4 - 9
- **Free Chlorine:** Undetectable
- **Iron:** < 0.1ppm
- **Manganese:** < 0.05 ppm

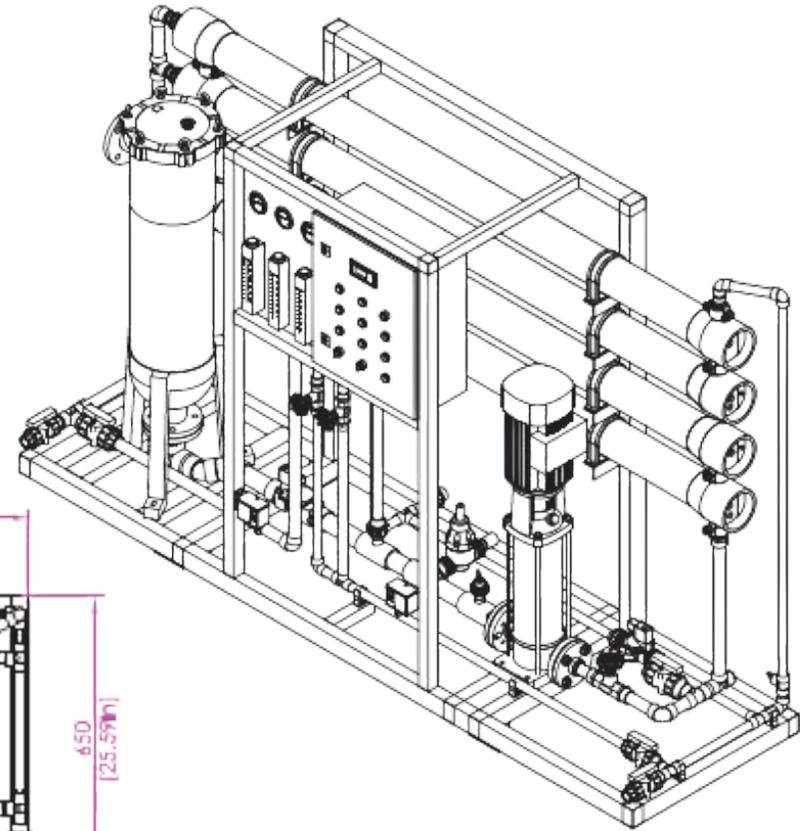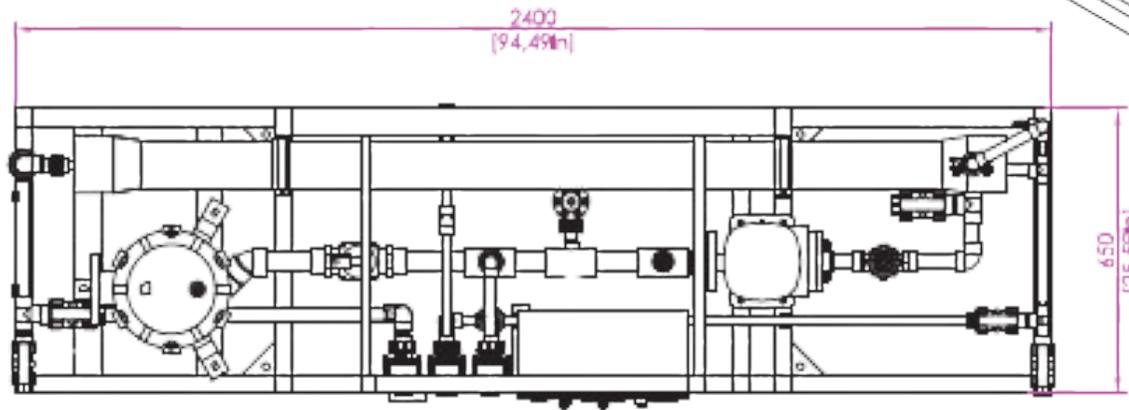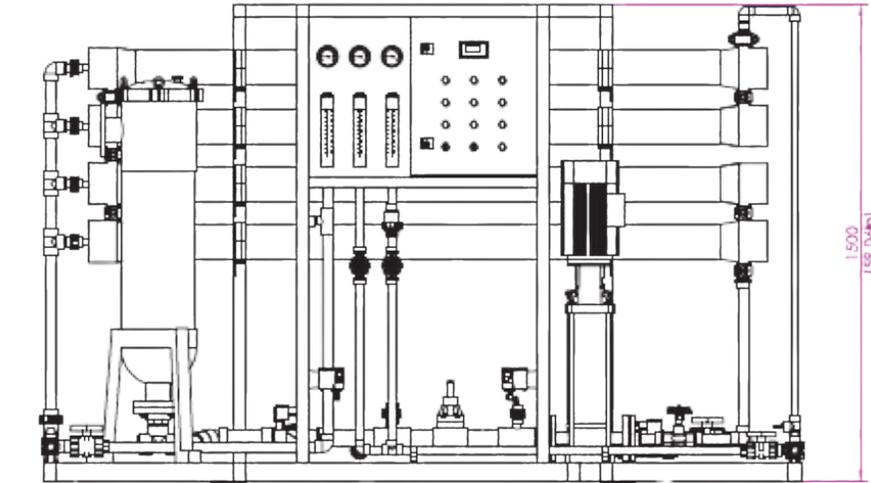

CRATED DIMENSION L(MM) * W (MM)* H(MM)	CRATED VOLUME (CUBIC METER)	GROSS WEIGHT (KG)	SYSTEM DIMENSION L(MM) * W (MM)* H(MM)	NET WEIGHT (KG)
2460*760*1680	3.14	307	2400*650*1500	187

***Specifications and dimensions subject to change**

***Permeate flows are maximums and may vary depending on feed water conditions**



+27 62 375 5088



+27 65 321 5803



<https://www.thewatersolarcompany.co.za/>



<https://maps.app.goo.gl/MBR2LMW3T6f9TtHV9>



<https://www.facebook.com/watersolarcompany>



<https://www.youtube.com/@TheWaterSolarCompany/>



<https://www.instagram.com/watersolarcompany2023/>