




The
WATER & SOLAR COMPANY
WATER & ENERGY SYSTEMS



CPM CENTRIFUGAL PUMPS



*Product
Catalogue*

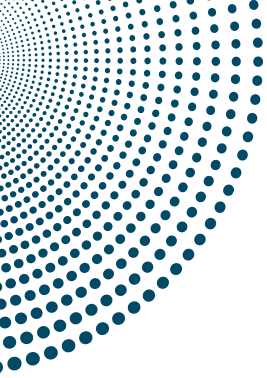

CPM CENTRIFUGAL PUMPS

Applications

For boosting pressure in a waterline

Warranty

1 year

According to our general sales conditions

Operating Conditions

Maximum fluid temperature up to +40°C

Maximum flow 80L/min to 140L/min

Maximum head height : 22m to 40m

Specifications

Inlet size : 1" (25mm)

Outlet size : 1" (25mm)



Single phase: 220V – 240V/50Hz

Power : 0.37W to 1.5KW

MODEL	KW	HP	INLET	OUTLET	DIMENSIONS (mm)			WEIGHT (kg)
					W	L	H	Nett
CPM130-1	0.37	0.55	1"	1"	168	215	265	8
CPM158-1	0.75	1	1"	1"	195	247	311	12
CPM170-1	1.1	1.5	1 & ¼"	1"	204	258	348	19
CPM190-1	1.5	2	1 & ¼"	1"	232	287	348	21.5

PERFORMANCE CURVES

MODEL	VOLTS	KW	HP	Q	DELIVER (L/HOUR)								
					0	1200	2400	3600	4200	4800	5400	6600	8400
CPM130-1	220	0.37	0.55	HEAD (m)	22	20	18	15.5	14	12	-	-	-
CPM158-1	220	0.75	1		36	34	31	27	24.5	21.5	18	-	-
CPM170-1	220	1.1	1.5		40	38	35.5	32.5	30.5	28.5	26	20	-
CPM190-1	220	1.5	2		40	39	38	36	35	34	32.5	29.5	24

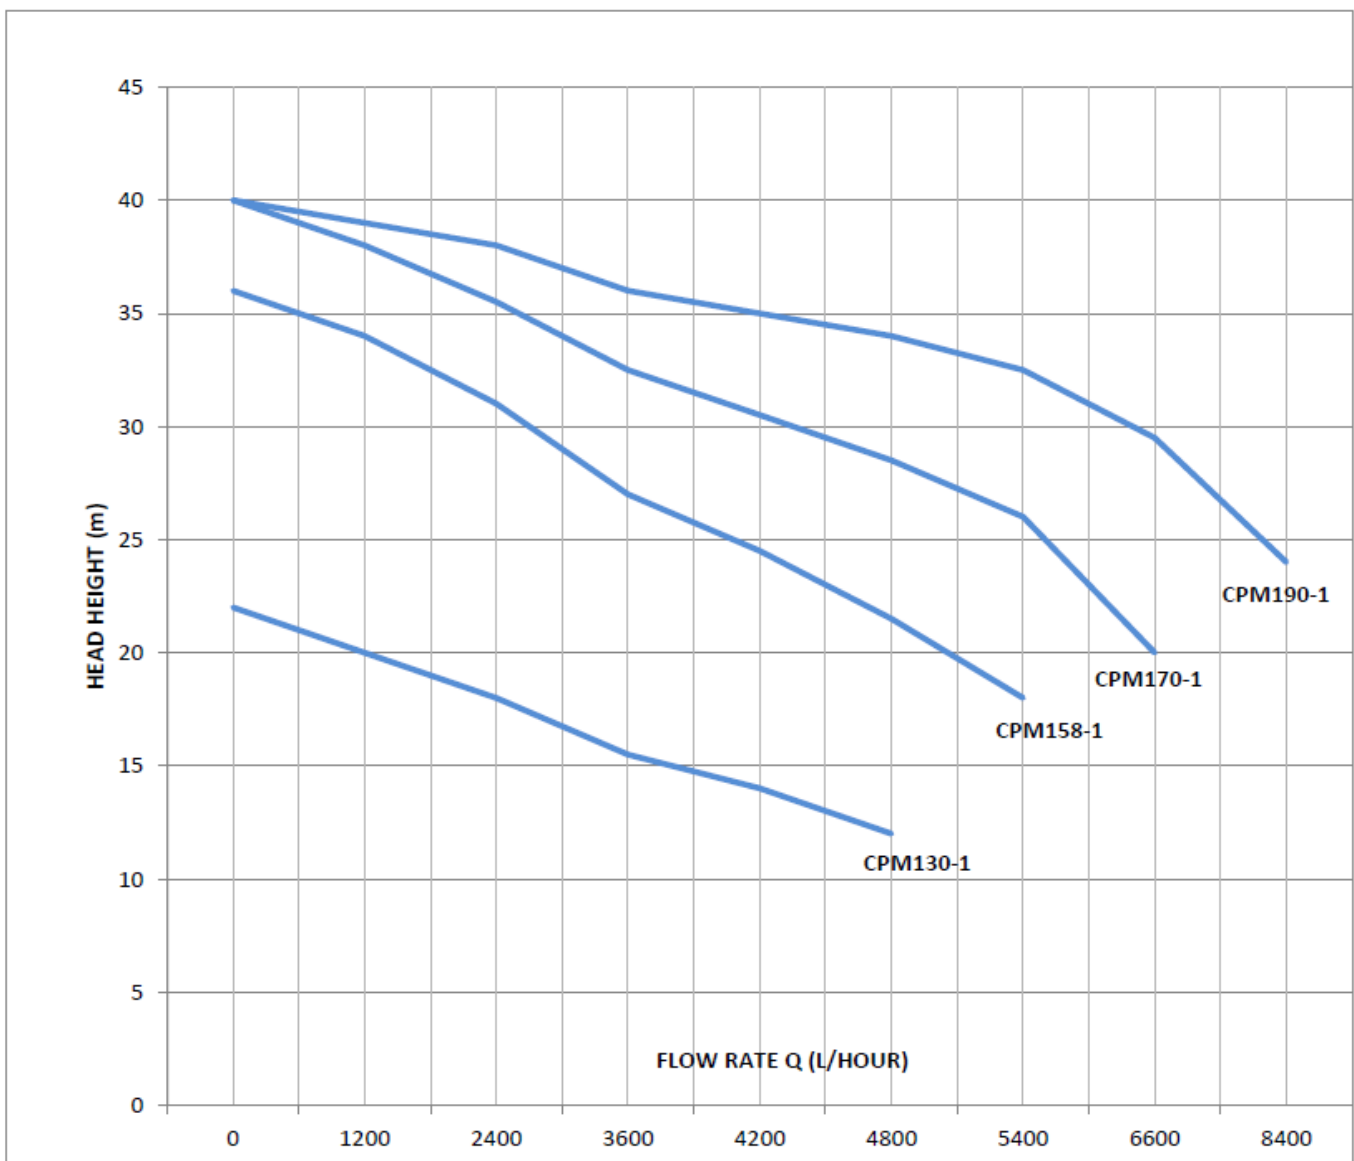



+27 62 375 5088



+27 65 321 5803



<https://www.thewatersolarcompany.co.za/>



<https://maps.app.goo.gl/MBR2LMW3T6f9TtHV9>



<https://www.facebook.com/watersolarcompany>



<https://www.youtube.com/@TheWaterSolarCompany/>



<https://www.instagram.com/watersolarcompany2023/>