

2HCM Centrifugal Pumps



Product Catalogue

2HCM Centrifugal Pumps

Applications

For boosting pressure in a waterline

Operating Conditions

Maximum fluid temperature up to +40°C

Maximum flow 180L/min – 200L/min

Maximum head height : 58m – 68m

Warranty

1 year

According to our general sales conditions

Specifications

Inlet size : 1 & ¼ ” (32mm)

Outlet size : 1” (25mm)


Single phase: 220V – 240V/50Hz

Power : 1.5KW / 2HP

MODEL	KW	HP	INLET	OUTLET	DIMENSIONS (mm)			WEIGHT (kg)
					W	L	H	Nett
2HCM25-160A	1.5	2	1 & ¼”	1”	260	520	340	34
2HCM25-160B	1.1	1.5	1 & ¼”	1”	240	440	280	27

Performance Curves

MODEL	VOLTS	KW	HP	Q	DELIVER (L/Min)									
					0	25	50	75	100	125	150	175	200	225
2HCM25-160A	220	1.1	1.5	HEAD (m)	38	38	37	36	34	32	30	27	24	20
2HCM25-160B	220	1.5	2		35	34	33	32	30	28	25	22	19	16

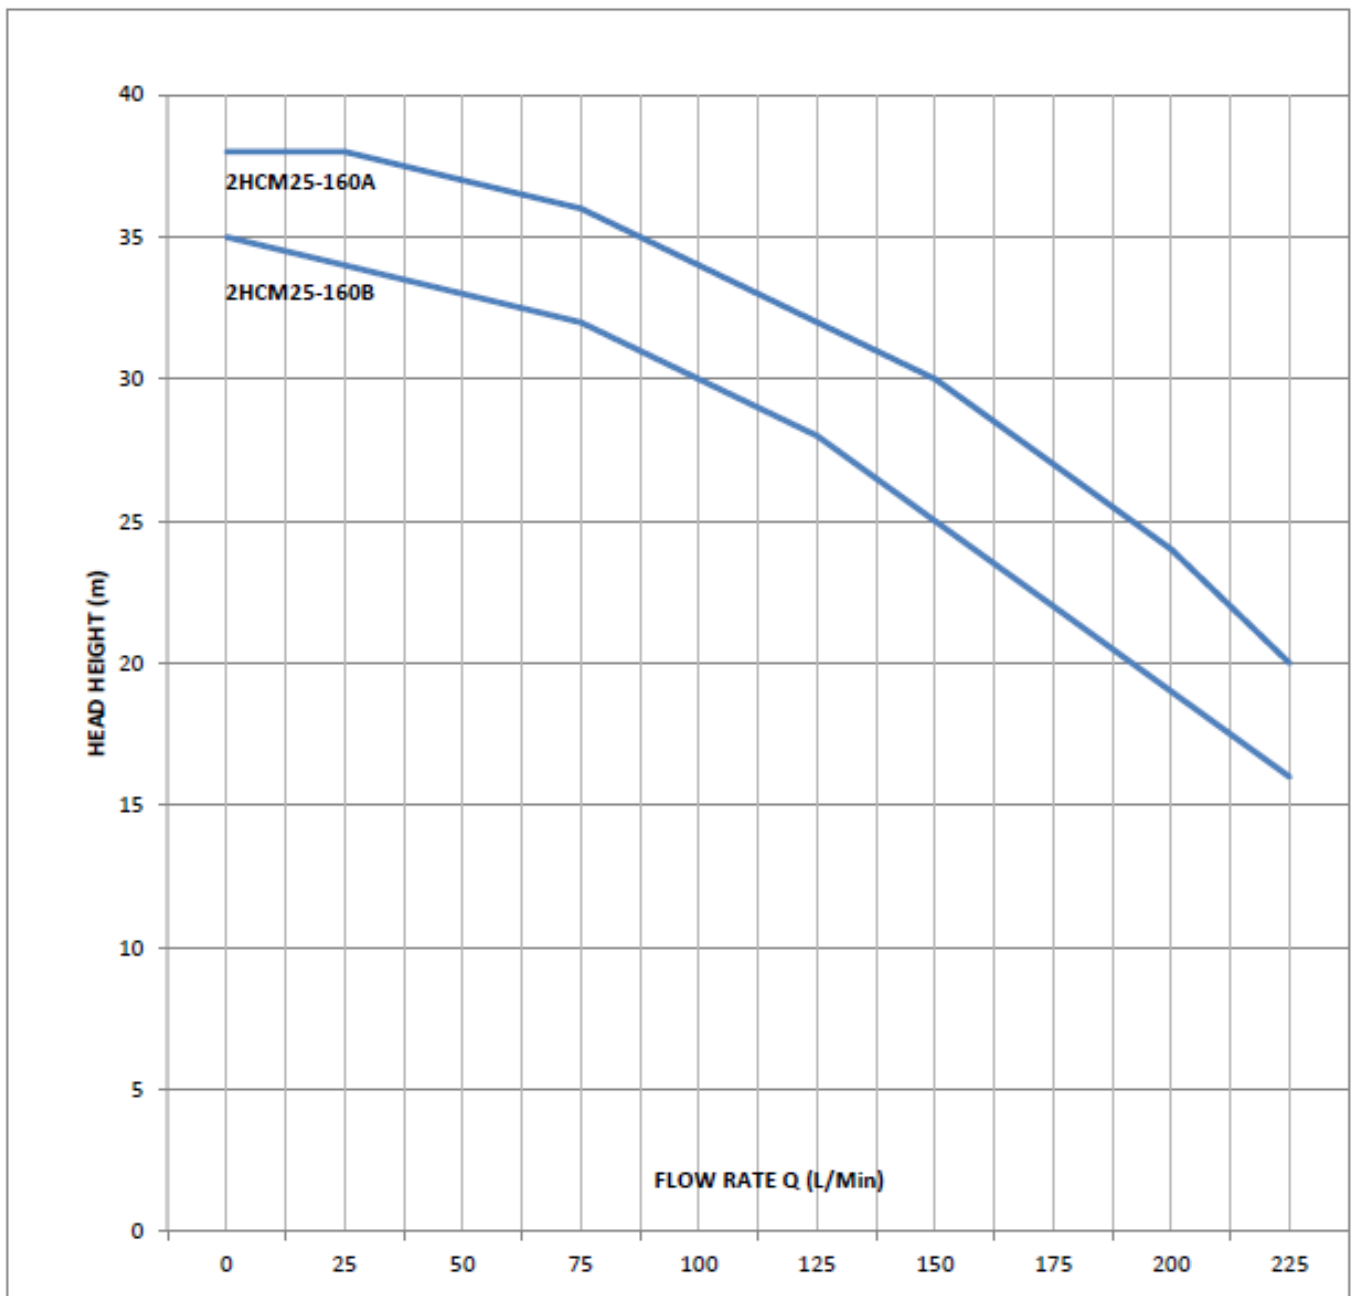



+27 62 375 5088



+27 65 321 5803



<https://www.thewatersolarcompany.co.za/>



<https://maps.app.goo.gl/MBR2LMW3T6f9TtHV9>



<https://www.facebook.com/watersolarcompany>



<https://www.youtube.com/@TheWaterSolarCompany/>



<https://www.instagram.com/watersolarcompany2023/>